

# THE VERSATILITY EXPERT OF SMALL HOOKLIFTS

MULTILIFT XR 5S, a member of our XR family, gives your 7.5 tonne GVW truck more possibilities. Easy handling and a wide range of possible load carriers bring enhanced versatility. Just swap the body and go.

## Small in size but a giant in performance

The MULTILIFT XR 5S offers an ingenious design of the gripping hook. Detaching the body onto the hook happens virtually automatically. Simply reverse to the body and lift it. Nothing could be easier. Intuitive control and smooth movements master loading and offloading and simplifies tipping of bodies. Low weight with great lifting power allows for a wide variety of uses – far beyond those of fixed flatbeds or tipper bodies.

## Increased versatility and larger payloads

Using the latest 3D-CAD methods and modern production technology to design and manufacture the XR Light-Range, we have minimised the welding needed in construction to give you a stronger structure. The exceptional low weight to high strength ratio enables larger payloads, enhances the versatility of the vehicle and maximises its rentability.

## Safety is key

As in all MULTILIFT demountables, safety is a key priority in the XR-series. Safety features include load-holding valves directly on the cylinders and a tipping lock mechanism. The XR-series meets all the minimum requirements of the EU's Directive on the Safety of Machinery.

## Technical data

Type	XR 5S		
Capacity (kg)	5000		
Gvw of the vehicle (t)	7.5		
Container length (internal) (m)	3.0 - 4.0	3.5 - 4.5	4.0 - 5.0
G-length (mm)	3250	3650	4150
Equipment weight (kg)	650	690	730
Tipping angle (°)	49	49	48
Hook height (mm)	930		
Body level (mm)	160		
Max. operating pressure (mpa)	30		
Recommended oil flow (l/min)	20 - 25		



PB-XR6S-EN-WW\_151207




multilift.com

**Cargotec Finland Oy**  
Nesteentie 36, P.O.Box 39  
FI-21201 Raisio, Finland  
tel. +358 204 55 2399  
fax +358 204 55 2231  
www.hiab.com



# MULTILIFT XR 5S

## XR LIGHT-RANGE HOOKLIFTS

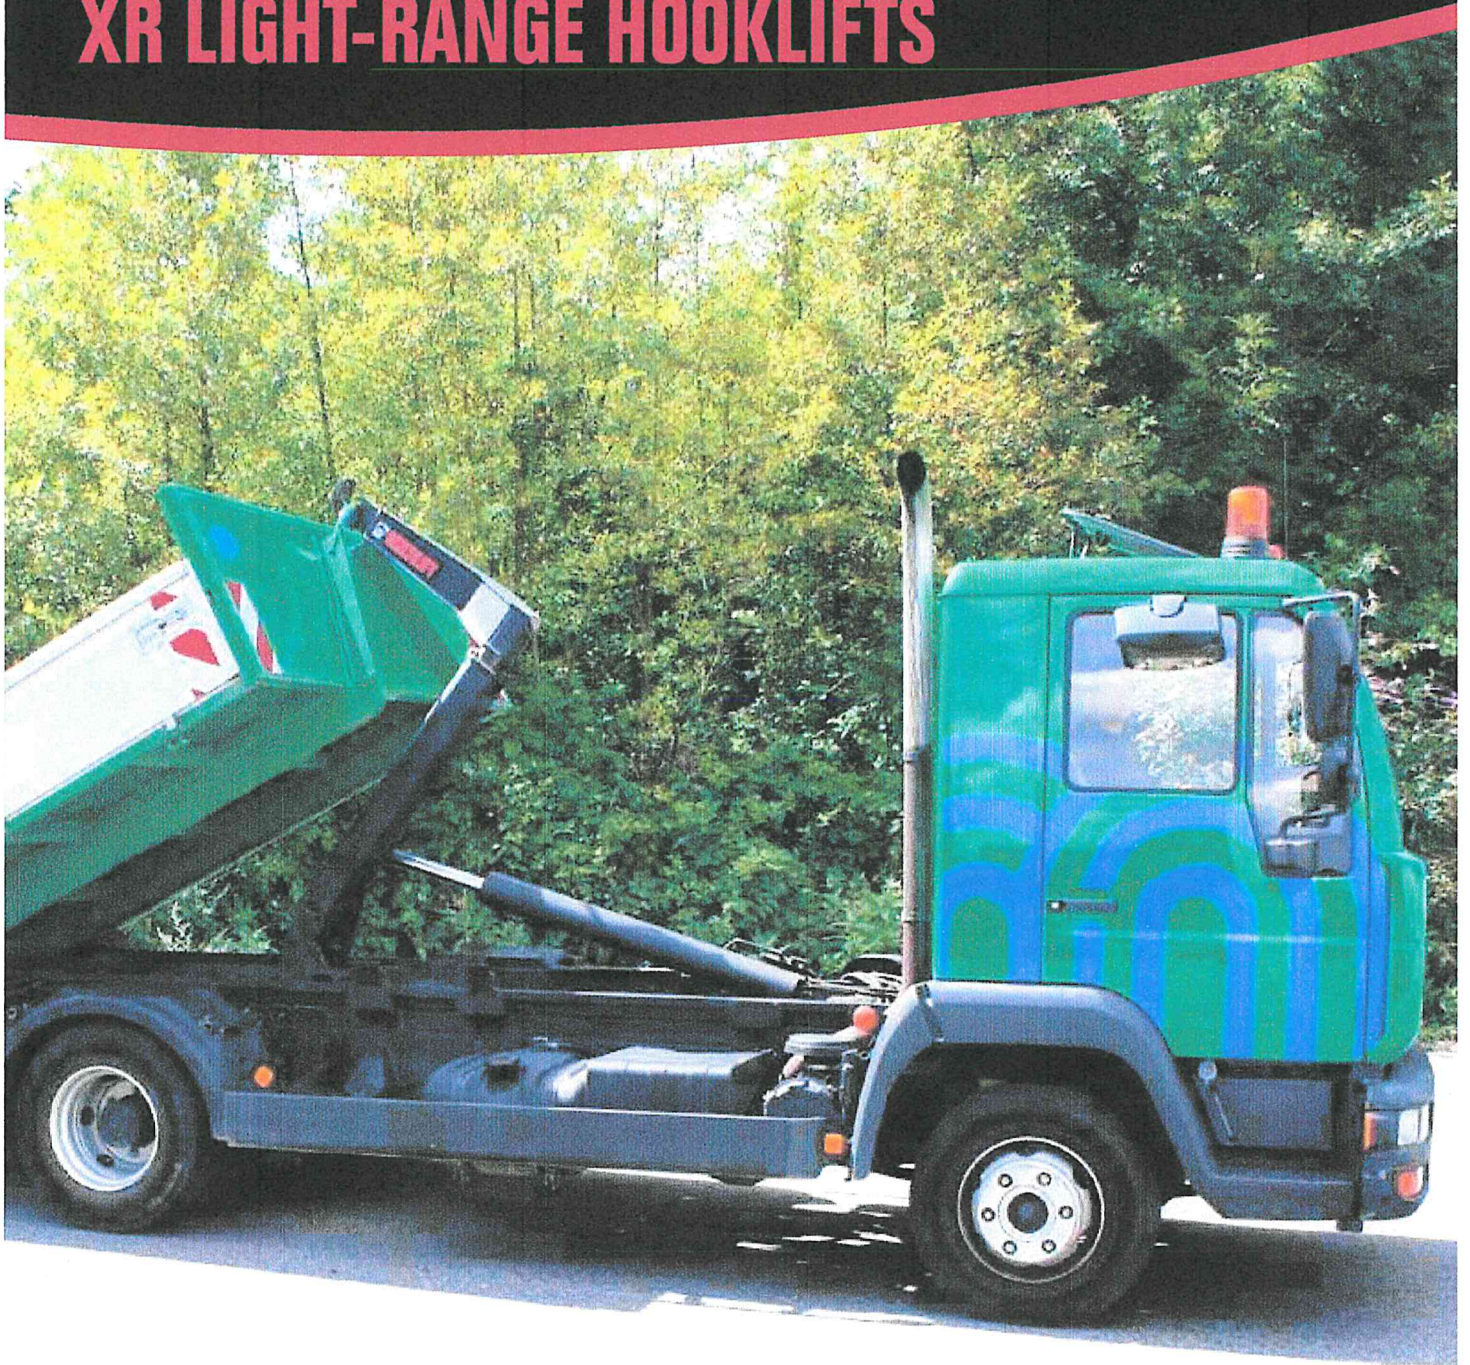

MODEL	CAPACITY (LB)	OPTIMUM BODY LENGTHS (FT)	MAX. TIPPING ANGLE (°)	HOOK HEIGHT (IN)	COMMON CA/CT (IN)	COMMON GVWR (LB)	FRAME HEIGHT (IN)	CLEAR FRAME (IN)	WEIGHT (LB)
XR5S-3050	12,000	10 - 12	50	36	84	19,500	UP TO 36	138	1,345
XR5S-3250	12,000	11 - 13	50	36	108	19,500	UP TO 36	149	1,433
XR5S-3650	12,000	12 - 14	50	36	120	19,500	UP TO 36	163	1,521
XR7S-3250	16,000	11 - 13	50	36	108	22,000	UP TO 40	149	2,050
XR7S-3650	16,000	12 - 14	50	36	120	22,000	UP TO 40	163	2,116
XR7S-4150	16,000	14 - 16	50	36	138	22,000	UP TO 40	179	2,183
XR8S-3650	18,000	12 - 14	50	54	120	26,000	UP TO 40	163	2,227
XR8S-4150	18,000	14 - 16	50	54	138	26,000	UP TO 40	181	2,293
XR10S-3650	22,000	12 - 14	50	54 / 62	128	33,000	UP TO 40	163	2,293
XR10S-4150	22,000	14 - 16	50	54 / 62	144	33,000	UP TO 40	181	2,359
XR10S-5100	22,000	17 - 19	50	54 / 62	174	33,000	UP TO 40	217	2,535
UTL14S-4300	30,000	14 - 16	50	54 / 62	156 / 138	35,000 / 42,000	UP TO 44	191	3,594
UTL14S-4600	30,000	15 - 17	50	54 / 62	168 / 145	35,000 / 42,000	UP TO 44	202	3,660
UTL14S-5600	30,000	18 - 20	50	54 / 62	204 / 186	35,000 / 42,000	UP TO 44	240	4,101
UTL16S-4600	40,000	15 - 17	50	54 / 62	145	48,000	UP TO 45	204	3,836
UTL16S-5600	40,000	18 - 20	50	54 / 62	186	48,000	UP TO 45	241	4,277
UTL21S-5600	50,000	18 - 20	50	54 / 62	186	58,000	UP TO 45	242	5,512
UTL21S-6100	50,000	20 - 22	50	54 / 62	204	58,000	UP TO 45	262	5,622
UTL26S-6100	60,000	20 - 22	50	54 / 62	204	68,000	UP TO 45	262	6,063
UTL26S-7000	60,000	23 - 25	50	62	230	68,000	UP TO 45	297	6,790
UTL30S-6100	72,000	20 - 22	50	62	204	80,000	UP TO 45	262	6,327

STANDARD PRODUCT FEATURES	XR5S-XR10S	ULT14S-ULT30S
Electric Cab Control	X	X
2-Speed Control		X
Flex PLC Control (up to 18 programmable buttons)		X
Body Up Indicator Light / Warning	X	X
High Tensile Steel Construction	X	X
Dual Pivot Design (true dump capability)	X	X
Hook Safety Latch	X	X
Soft Lowering (dump cycle)		X
Friction Relief (load/unload cycle)		X
Float Function (rough & off-road situations)		X
Pull Limiter (managing short bodies)		X
Solid Cast Inserts (at all critical high-stress areas)		X
Sensors & Wiring - IP67 rating (dust & water proof)	X	X
Paint - zinc primer and finish top coat (black - RAL 9005)	X	X
ISO 9001 Certification	X	X

### MULTILIFT APPLICATIONS

- Dump bodies
- Flatbeds
- Liquid/water tanks
- Sand/salt spreaders
- Open-top containers
- Chipper bodies
- Leaf loaders
- Jet/vac
- Van bodies
- Asphalt patchers
- Cement mixers
- Mobile office
- and many more